

VarioCAM[®] hr head security

Thermal Infrared Camera System for Security and Surveillance Applications

Reconnaissance



Investigation




Surveillance up to 7 km



Site Protection



Investigation

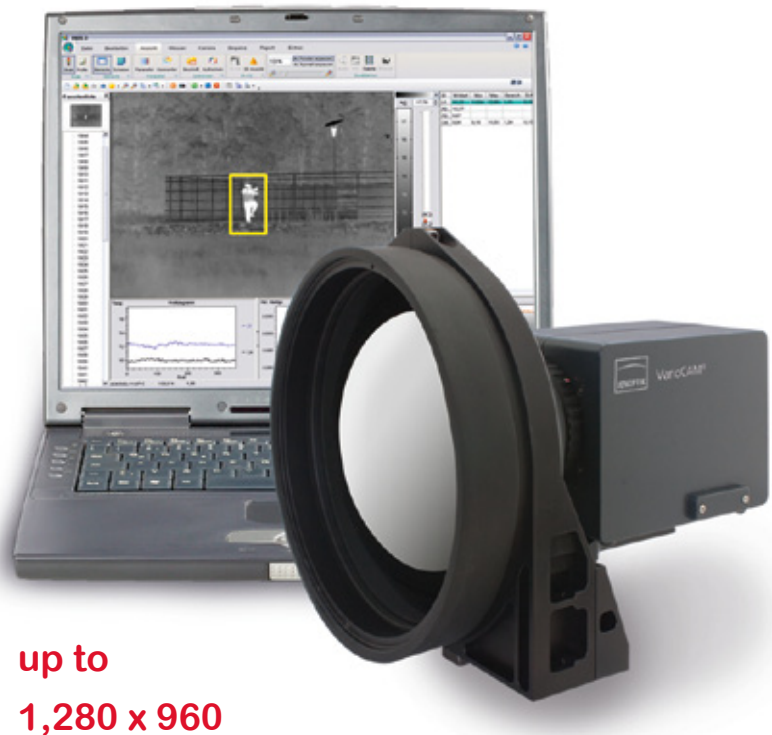

up to
1,280 x 960
Infrared pixels

Features

- Uncooled FPA detector with (384 x 288) or (640 x 480) IR-pixels for noiseless long-term observations
- Optomechanic microscan function („Resolution Enhancement“) provides up to (1,280 x 960) IR-pixels
- Spectral range (7.5 ... 14) μm , perfectly designed for long ranges and 24/7 observation tasks
- Real-time thermography up to 60 Hz
- Real-time digital interface via FireWire (IEEE 1394)* or Gigabit Ethernet*
- Image transfer via analogue video interface
- Remote control option via serial interface
- Tough aluminum body for harsh outdoor applications (IP 65)
- Different versions available (video data transmission case*)
- Pan-tilt head and protective housing available

* Depending on the particular camera configuration.

VarioCAM® hr head security

Thermal Infrared Camera System for Security and Surveillance Applications

Technical specifications

Spectral range	(7.5 ... 14) µm
Detector type, Detector format (pixel)	Microbolometer Focal Plane Array, uncooled, (384 x 288), „Resolution Enhancement“ to (768 x 576)* (640 x 480), „Resolution Enhancement“ to (1,280 x 960)*
Temperature measurement range	(-40 ... 300) °C, optional > 2,000 °C
Measurement accuracy	± 1.5 K (0 ... 100) °C; ± 2 % (< 0 resp. > 100) °C
Temperature resolution @ 30 °C	better than 0.05 K, optional 0.03 K
IR-frame rate	50/60 Hz
Standard lens (object field)	1.0/25 mm (30 x 23)° with a detector of (384 x 288) pixels 1.0/30 mm (30 x 23)° with a detector of (640 x 480) pixels
Image storage	SD-card, FireWire (IEEE 1394)*, Gigabit Ethernet*
Dynamic range	16 Bit
Interfaces	PAL/NTSC-FBAS, S-Video, RS232, FireWire (IEEE 1394)*, Gigabit Ethernet*
Power supply	power adapter, FireWire (IEEE 1394)*
Operation temperature, encapsulation	(-15 ... 50) °C, IP 65
Dimensions	(133 x 91 x 110) mm
Weight	1.3 kg with standard lens

* Depending on the particular camera configuration.

The radiometric thermography system VarioCAM® hr head security is based on an uncooled Microbolometer FPA Detector with (384 x 288) or (640 x 480) IR-pixels and has been designed for a wide range of security applications. With its rugged metal housing (IP 65) and a choice of exchangeable lenses VarioCAM® hr head security is perfectly suited for deployed operation, covered investigation or perimeter protection.

Due to the compact dimensions VarioCAM® hr head security can be operated as stand-alone system or offers an integration into different vehicle systems. In combination with the thermoelectrically stabilized camera core the exchangeable f/1.0 Jenoptik lenses allow long-range detection, recognition or identification of persons and vehicles. Specifically customised this thermographic system also can be used for surveillance tasks which require continuous and automatic or remote operation.

Applications

- Covered investigation by police force units
- Surveillance by customs or border police
- Site protection
- Reconnaissance
- Vehicle integration

Lenses

Lens	Focal distance	FOV (°)	
		(384 x 288)	(640 x 480)
Wide angle lens	12.5 mm	(57 x 44)	(65 x 51)
Standard lens	25 mm	(30 x 23)	-
Standard lens	30 mm	(25 x 19)	(30 x 23)
Telephoto lens	50 mm	(15 x 12)	(18 x 14)
Telephoto lens	75 mm	(10 x 8)	(12 x 9)
Telephoto lens	130 mm	(6 x 4)	(7 x 5)



Design and specifications subject to change without prior notice.

Produced by